


SF01 MONOCHROMATIC DATA-SHEET



TECHNICALS FEATURES:

Materials	Glass ; Die cast aluminium
Power Supply	500 mA constant current
Power	20 W
Light Source	COB LED
Colour Temperature	3000 K ; 4000 K
Lifetime	> 50000 h
Optics	Narrow beam 11°, Medium beam 22°, Wide beam 37°
Screen	tempered 3mm glass resistant to thermal shocks and impacts
Tc body	< 90 °C
Ta operating temperature	- 30 ÷ 50 °C
Ts surface temperature	≤ 65 °C
Functions	On/Off ; dimmable
Cable	AWM style 20233 2xAWG18 (0,75mm ²) (Red;Black) Ø 5,2 mm L. 100 mm.
Weigth	520 g
Installations	Surface (wall, floor, ceiling)
Norms	60598-1 ; 60598-2 and its parts

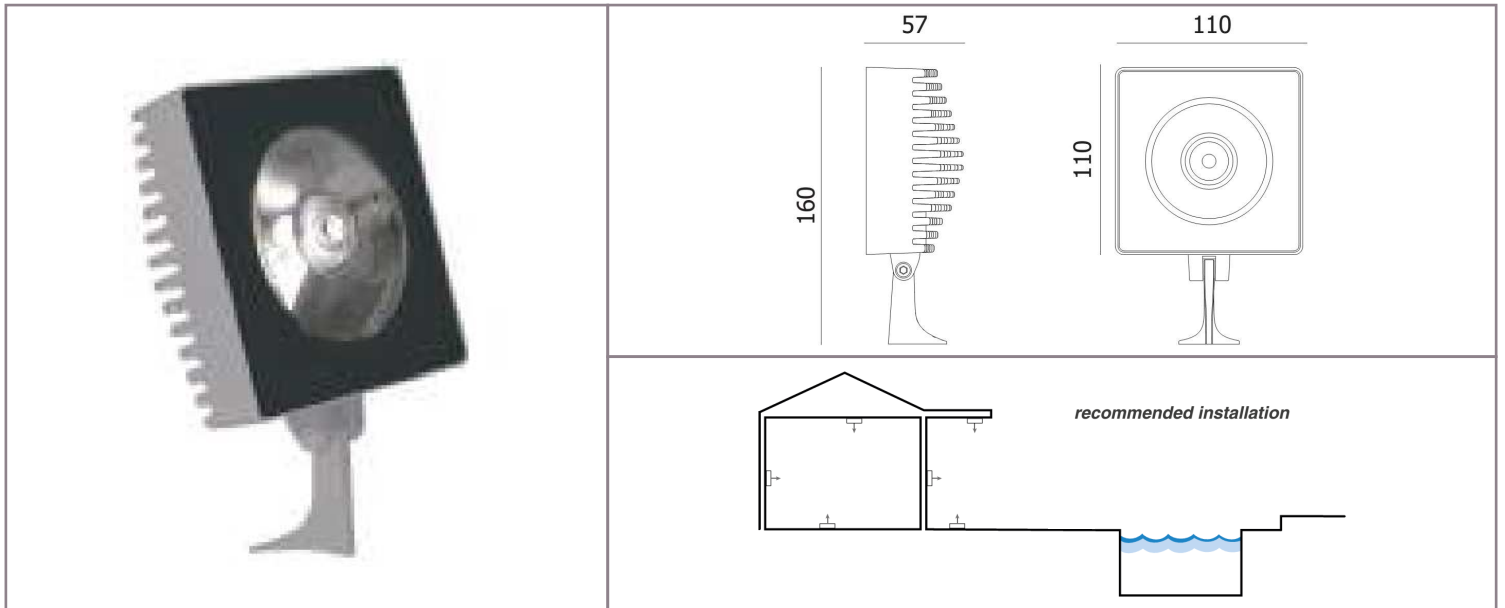

NOTE:

Power supplies, control&dimming devices and fixing kits must to be orderd separately. Aldabra power supply consumption is equal to 15% of the fixture nominal power.
Photometric data available at www.aldabra.it

SF01 MONOCHROMATIC DATA-SHEET

GENERAL FEATURES:

	power (W)	Power supply
SF01.01.XXXXX.X	20	500 mA

OPTICAL FEATURES:


SF01.XX.MXXXX.X	Narrow beam 11°
SF01.XX.FXXXX.X	Medium beam 22°
SF01.XX.WXXXX.X	Wide beam 37°

LED FEATURES:


	COB LED	lm/W	Ra	Chromatic selection
SF01.XX.X30XX.X	3000 K warm white	145	>80	MacAdam 3-step
SF01.XX.X40XX.X	4000 K neutral white	145	>80	MacAdam 3-step

FINISHES FEATURES:


SF01.XX.XXXG2.X	Grey sablé
-----------------	------------

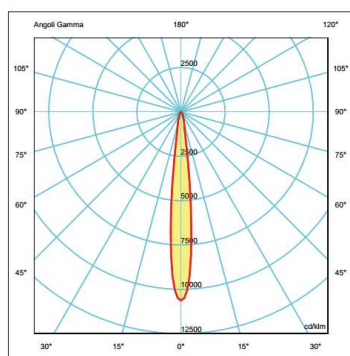

Narrow beam 11°

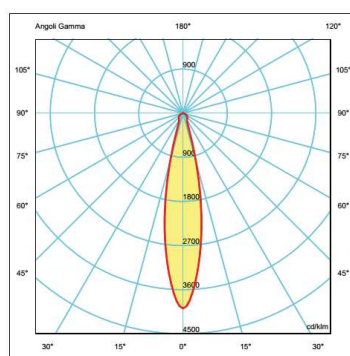

Medium beam 22°

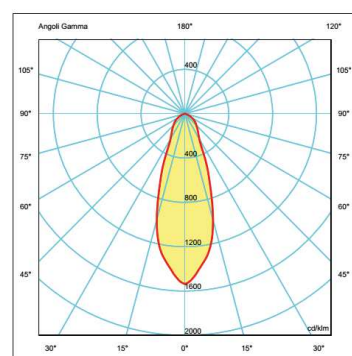

Wide beam 37°