


SELENE Monochromatic Power LED

DATA-SHEET

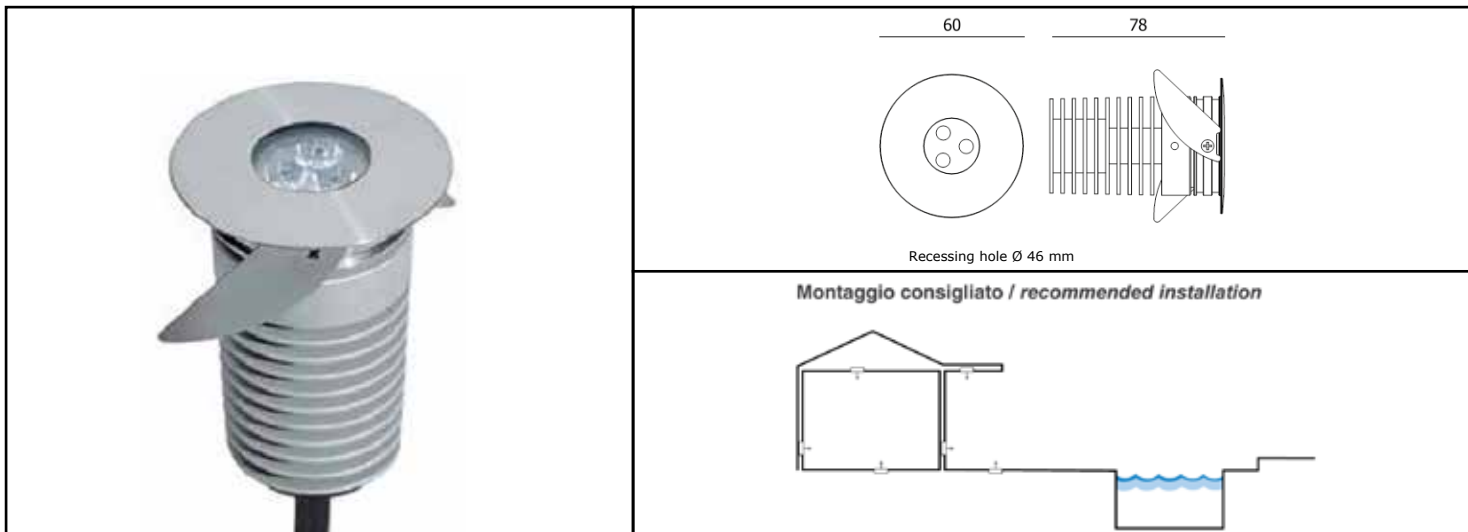

PRODUCT DESCRIPTION:

Professional recessed fixture suitable for indoor and outdoor settings.
UV resistance of all materials.

TECHNICALS FEATURES:

Materials	ANTICORODAL aluminium alloy
Front	Stainless steel AISI 316L or ANTICORODAL aluminium alloy
Finishes	Anodized Aluminium ; satin stainless steel AISI 316 L
Power Supply	24 Vdc constant voltage ; 350/500 mA constant current
Power	3LED: 3 W 350 mA - 4,5 W 500 mA - 5 W 24 Vdc 4LED: 4 W 350 mA - 6 W 500 mA - 7 W 24 Vdc
Light Source	Power LED LM 80 COMPLIANT
Color Temperature	2700K ; 3000K ; 4000K
Ra	> 80
Chromatic Selection	Mac-Adam 2-step
Lifetime	> 50000 h (TM21 L80 B10 @50000h)
Optics	Narrow beam (10°) - medium beam (25°) - wide beam (35°) - transparent (65°) and satin diffuser (67°)
Tc metal body	< 90 °C
Ta operating temperature	- 30 ÷ 50 °C
Ts surface temperature	≤ 65 °C
Load resistance	walk-over up to 500 Kg
Functions	On/Off ; dimmable
Cable	350/500 mA: AWM style 20233 2xAWG18 (Red;Black) Ø 5,2 L. 0,5 m. 24 Vdc: AWM style 20233 2xAWG18 (Red;Black)+1xAWG20 (Violet) Ø 6,2 L. 1m.
Weigth	350/500 mA: 162 g. (Aluminium) - 188 g. (stainless steel) 24 Vdc: 202 g. (Aluminium) - 228 g. (stainless steel)
Installations	Recessed (wall, ceiling, floor)
Norms	60598-1 ; 60598-2 and its parts



NOTE:

Power supplies, control&dimming devices and fixing kits must to be orderd separately. Aldabra power supply consumption is equal to 15% of the fixture nominal power.
Photometric data available at www.aldabra.it

Specifications are subject to change without notice.

SELENE Monochromatic Power LED DATA-SHEET

GENERAL FEATURES:

	LED number	power (W) @ 350 mA	power (W) @ 500 mA	power (W) @ 24 Vdc
SEL.01.XXXXX.X	3	3	4,5	
SEL.02.XXXXX.X	4	4	6	
SEL.03.XXXXX.X	3			5
SEL.04.XXXXX.X	4			7

OPTICAL FEATURES:


SEL.XX.MXXXX.X	Narrow beam 10°
SEL.XX.FXXXX.X	Medium beam 25°
SEL.XX.WXXXX.X	Wide beam 35°
SEL.XX.TXXXX.X	Transparent diffuser 65°
SEL.XX.SXXXX.X	Satin diffuser 67°

LED FEATURES:


	Power LED	lm/W	Ra	Chromatic selection
SEL.XX.X27XX.X	2700K warm white	105	>80	MacAdam 2-step
SEL.XX.X30XX.X	3000K warm white	117	>80	MacAdam 2-step
SEL.XX.X40XX.X	4000K neutral white	130	>80	MacAdam 2-step

FINISHES FEATURES:


SEL.XX.XXXA1.X	Anodized Aluminum
SEL.XX.XXXS1.X	Satin stainless steel AISI 316 L




narrow beam 10°




medium beam 25°



wide beam 35°



transparent diffuser 65°



satin diffuser 67°

GENERAL INFORMATIONS:

Kindly note that atmospheric agents (such as lightnings, etc) , electrostatics charges or disturbances on the installation not caused by Aldabra lighting fixtures and Led drivers indicated by Aldabra itself, may cause damages on the fixtures. It is necessary that the electrical installation where the LED lighting fittings and their power supply units and control gears are installed must be equipped with proper devices for the protection and suppression of transient phenomena (SPD, isolation transformer, etc...). Such devices must be coordinated with the other protections of the installation; on this theme, it's necessary to refer to the electrical installations norms which are in force in each country.

SELENE Monochromatic Power LED DATA-SHEET

RECESSING BOXES:


CSF.0014.0

standard recessing box




CSF.0015.0

draining recessing box



SELENE RGB Power LED

DATA-SHEET

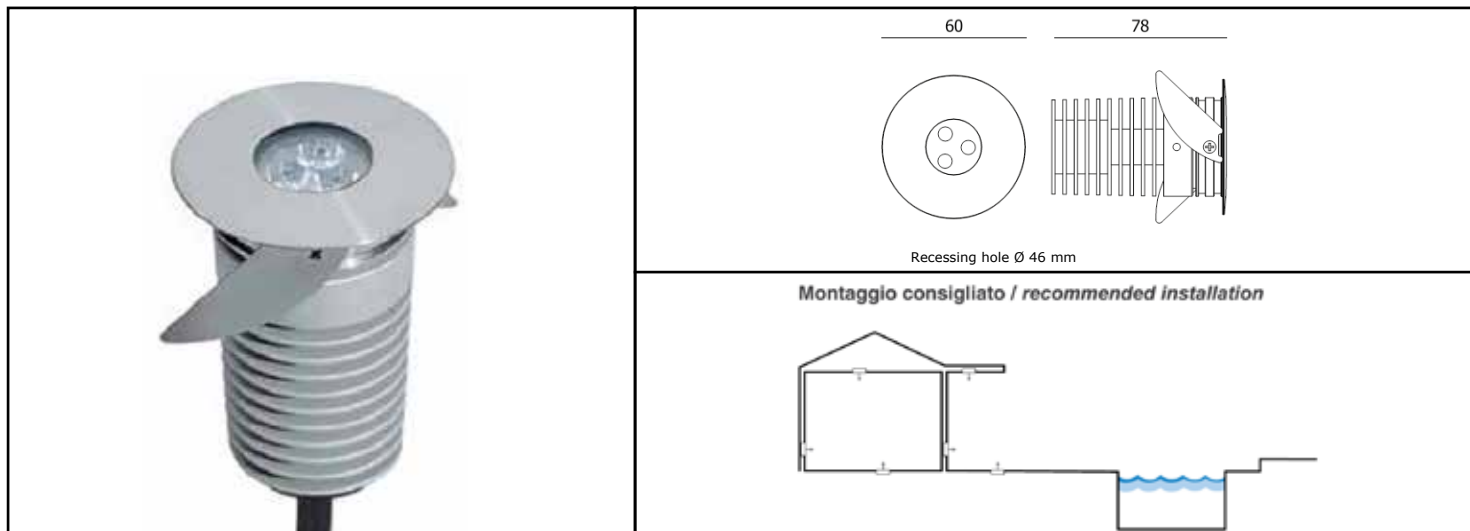

PRODUCT DESCRIPTION:

Professional recessed fixture suitable for indoor and outdoor settings.
UV resistance of all materials.

TECHNICALS FEATURES:

Materials	ANTICORODAL aluminium alloy
Front	Stainless steel AISI 316L or ANTICORODAL aluminium alloy
Finishes	Anodized Aluminium ; satin stainless steel AISI 316 L
Power Supply	24 Vdc constant voltage
Power	4 W
Light Source	Power LED LM 80 COMPLIANT
Dominant Wavelength	R=622nm, G=530nm, B=470nm
Lifetime	> 50000 h (TM21 L80 B10 @50000h)
Optics	wide beam (45°) - transparent (65°) and satin diffuser (67°)
Tc metal body	< 90 °C
Ta operating temperature	- 30 ÷ 50 °C
Ts surface temperature	≤ 65 °C
Load resistance	walk-over up to 500 Kg
Functions	On/Off ; dimmable
Cable	AWM style 20233 2xAWG18 (Red;Black)+3xAWG20 (R/N, G/N, B/N) L. 1m.
Weight	202 g. (Aluminium) - 228 g. (stainless steel)
Installations	Recessed (wall, ceiling, floor)
Norms	60598-1 ; 60598-2 and its parts



960°C



NOTE:
Power supplies, control&dimming devices and fixing kits must to be orderd separately. Aldabra power supply consumption is equal to 15% of the fixture nominal power.
Photometric data available at www.aldabra.it

SELENE RGB Power LED DATA-SHEET

GENERAL FEATURES:

	power (W)
SEL.04.XXXXX.X	4

OPTICAL FEATURES:


SEL.XX.WXXXX.X	Wide beam 45°
SEL.XX.TXXXX.X	Transparent diffuser 65°
SEL.XX.SXXXX.X	Satin diffuser 67°

LED FEATURES:


	Power LED
SEL.XX.X90XX.X	R, G, B

FINISHES FEATURES:


SEL.XX.XXXA1.X	Anodized Aluminium
SEL.XX.XXXS1.X	Satin stainless steel AISI 316 L

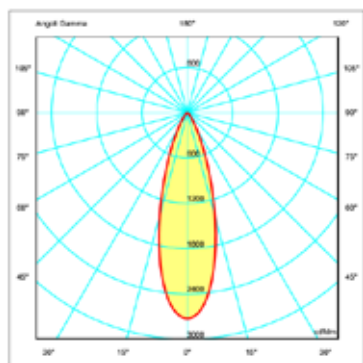

wide beam 45°

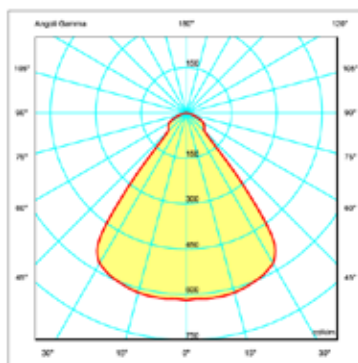

transparent diffuser 65°

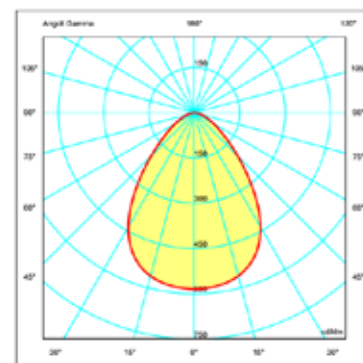

satin diffuser 67°

GENERAL INFORMATIONS:

Kindly note that atmospheric agents (such as lightnings, etc) , electrostatics charges or disturbances on the installation not caused by Aldabra lighting fixtures and Led drivers indicated by Aldabra itself, may cause damages on the fixtures. It is necessary that the electrical installation where the LED lighting fittings and their power supply units and control gears are installed must be equipped with proper devices for the protection and suppression of transient phenomena (SPD, isolation transformer, etc...). Such devices must to be coordinated with the other protections of the installation; on this theme, it's necessary to refer to the electrical installations norms which are in force in each country.

SELENE RGB Power LED DATA-SHEET

RECESSING BOXES:


CSF.0014.0

standard recessing box




CSF.0015.0

draining recessing box



SELENE Monochromatic High Power LED DATA-SHEET

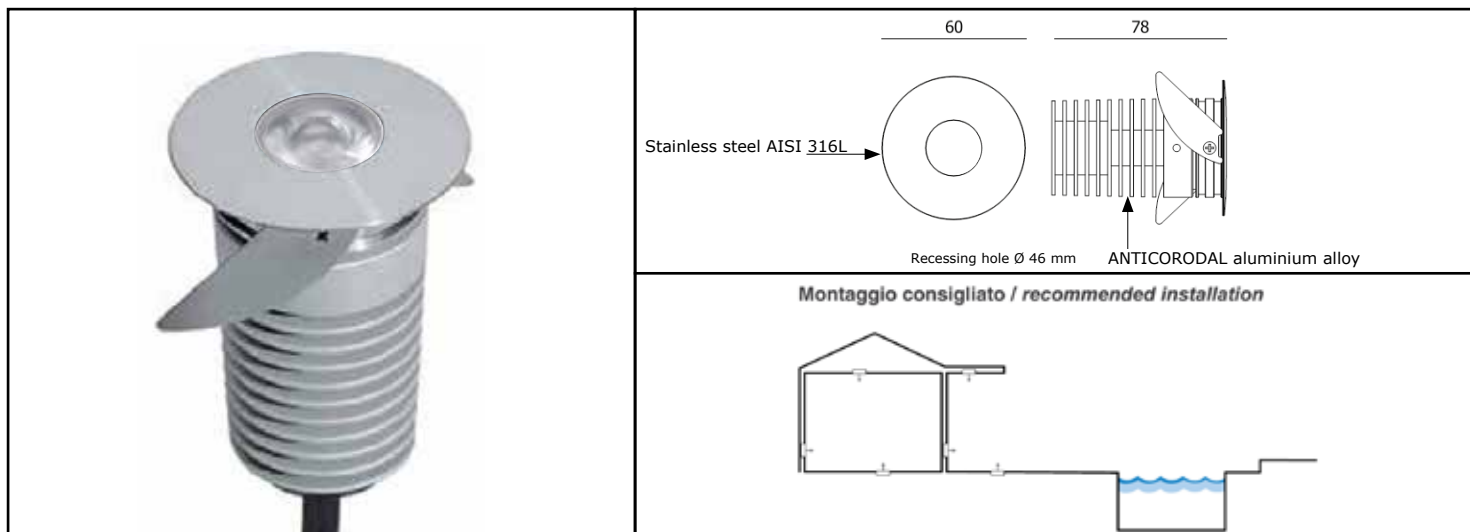

PRODUCT DESCRIPTION:

Professional recessed fixture suitable for indoor and outdoor settings.
UV resistance of all materials.

TECHNICALS FEATURES:


Materials	ANTICORODAL aluminium alloy , Stainless steel AISI 316L
Body	ANTICORODAL aluminium alloy
Front	Stainless steel AISI 316L
Finishes	satin stainless steel AISI 316 L
Power Supply	24 Vdc constant voltage
Power	7W
Light Source	High Power LED Cree XHP35 LM 80 COMPLIANT
Color Temperature	3000K
Luminous efficiency	117 lm/W
Ra	> 80
Chromatic Selection	Mac-Adam 2-step
Lifetime	> 50000 h (TM21 L80 B10 @50000h)
Optics	transparent (65°)
Tc metal body	< 90 °C
Ta operating temperature	- 30 ÷ 45 °C
Ts surface temperature	≤ 65 °C
Load resistance	walk-over up to 500 Kg
Functions	On/Off ; dimmable
Cable	AWM style 20233 2xAWG18 (Red;Black)+1xAWG20 (Violet) Ø 6,2 L. 1m.
Weigth	228 g.
Installations	Recessed (wall, ceiling, floor)
Norms	60598-1 ; 60598-2 and its parts



NOTE:
Power supplies, control&dimming devices and fixing kits must to be orderd separately. Aldabra power supply consumption is equal to 15% of the fixture nominal power.
Photometric data available at www.aldabra.it

Specifications are subject to change without notice.

SELENE Monochromatic High Power LED DATA-SHEET

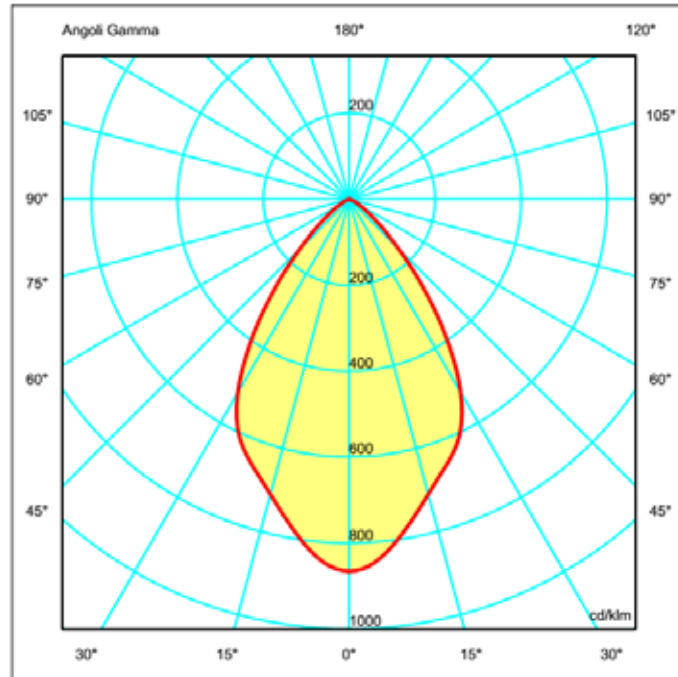

Product code	Code	Release date	Product	Power	Supply	CCT	Optics	lux (lm) *tj=25 **	Fixture Flux (lm)
SEL.01.M27A1.0	SEL.01.M27XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	2700 K	Lens 10°	310,80**	219,29
SEL.01.M27S1.0	SEL.01.M27XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	2700 K	Lens 10°	310,80**	219,29
SEL.01.M30A1.0	SEL.01.M30XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	3000 K	Lens 10°	327,60**	231,14
SEL.01.M30S1.0	SEL.01.M30XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	3000 K	Lens 10°	327,60**	231,14
SEL.01.M40A1.0	SEL.01.M40XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	4000 K	Lens 10°	361,20**	254,84
SEL.01.M40S1.0	SEL.01.M40XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	4000 K	Lens 10°	361,20**	254,84
SEL.01.M27A1.0	SEL.01.M27XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	2700 K	Lens 10°	416,25**	294,86
SEL.01.M27S1.0	SEL.01.M27XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	2700 K	Lens 10°	416,25**	294,86
SEL.01.M30A1.0	SEL.01.M30XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	3000 K	Lens 10°	438,75**	310,79
SEL.01.M30S1.0	SEL.01.M30XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	3000 K	Lens 10°	438,75**	310,79
SEL.01.M40A1.0	SEL.01.M40XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	4000 K	Lens 10°	483,75**	342,66
SEL.01.M40S1.0	SEL.01.M40XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	4000 K	Lens 10°	483,75**	342,66
SEL.03.M27A1.0	SEL.03.M27XX.0	13/11	Selene 3x	5W	24V	2700 K	Lens 10°	416,25**	294,86
SEL.03.M27S1.0	SEL.03.M27XX.0	13/11	Selene 3x	5W	24V	2700 K	Lens 10°	416,25**	294,86
SEL.03.M30A1.0	SEL.03.M30XX.0	13/11	Selene 3x	5W	24V	3000 K	Lens 10°	438,75**	310,79
SEL.03.M30S1.0	SEL.03.M30XX.0	13/11	Selene 3x	5W	24V	3000 K	Lens 10°	438,75**	310,79
SEL.03.M40A1.0	SEL.03.M40XX.0	13/11	Selene 3x	5W	24V	4000 K	Lens 10°	483,75**	342,66
SEL.03.M40S1.0	SEL.03.M40XX.0	13/11	Selene 3x	5W	24V	4000 K	Lens 10°	483,75**	342,66
SEL.02.M27A1.0	SEL.02.M27XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	2700 K	Lens 10°	414,40**	289,59
SEL.02.M27S1.0	SEL.02.M27XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	2700 K	Lens 10°	414,40**	289,59
SEL.02.M30A1.0	SEL.02.M30XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	3000 K	Lens 10°	436,80**	305,23
SEL.02.M30S1.0	SEL.02.M30XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	3000 K	Lens 10°	436,80**	305,23
SEL.02.M40A1.0	SEL.02.M40XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	4000 K	Lens 10°	481,60**	336,50
SEL.02.M40S1.0	SEL.02.M40XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	4000 K	Lens 10°	481,60**	336,50
SEL.02.M27A1.0	SEL.02.M27XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	2700 K	Lens 10°	555,00**	390,40
SEL.02.M27S1.0	SEL.02.M27XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	2700 K	Lens 10°	555,00**	390,40
SEL.02.M30A1.0	SEL.02.M30XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	3000 K	Lens 10°	585,00**	413,46
SEL.02.M30S1.0	SEL.02.M30XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	3000 K	Lens 10°	585,00**	413,46
SEL.02.M40A1.0	SEL.02.M40XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	4000 K	Lens 10°	645,00**	453,64
SEL.02.M40S1.0	SEL.02.M40XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	4000 K	Lens 10°	645,00**	453,64
SEL.04.M27A1.0	SEL.04.M27XX.0	13/11	Selene 4x	7W	24V	2700 K	Lens 10°	555,00**	390,40
SEL.04.M27S1.0	SEL.04.M27XX.0	13/11	Selene 4x	7W	24V	2700 K	Lens 10°	555,00**	390,40
SEL.04.M30A1.0	SEL.04.M30XX.0	13/11	Selene 4x	7W	24V	3000 K	Lens 10°	585,00**	413,46
SEL.04.M30S1.0	SEL.04.M30XX.0	13/11	Selene 4x	7W	24V	3000 K	Lens 10°	585,00**	413,46
SEL.04.M40A1.0	SEL.04.M40XX.0	13/11	Selene 4x	7W	24V	4000 K	Lens 10°	645,00**	453,64
SEL.04.M40S1.0	SEL.04.M40XX.0	13/11	Selene 4x	7W	24V	4000 K	Lens 10°	645,00**	453,64
SEL.01.F27A1.0	SEL.01.F27XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	2700 K	Lens 25°	344,40**	213,08
SEL.01.F27S1.0	SEL.01.F27XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	2700 K	Lens 25°	344,40**	213,08
SEL.01.F30A1.0	SEL.01.F30XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	3000 K	Lens 25°	361,20**	223,35
SEL.01.F30S1.0	SEL.01.F30XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	3000 K	Lens 25°	361,20**	223,35
SEL.01.F40A1.0	SEL.01.F40XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	4000 K	Lens 25°	394,80**	244,12
SEL.01.F40S1.0	SEL.01.F40XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	4000 K	Lens 25°	394,80**	244,12
SEL.01.F27A1.0	SEL.01.F27XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	2700 K	Lens 25°	416,25**	286,50
SEL.01.F27S1.0	SEL.01.F27XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	2700 K	Lens 25°	416,25**	286,50
SEL.01.F30A1.0	SEL.01.F30XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	3000 K	Lens 25°	438,75**	300,32
SEL.01.F30S1.0	SEL.01.F30XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	3000 K	Lens 25°	438,75**	300,32
SEL.01.F40A1.0	SEL.01.F40XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	4000 K	Lens 25°	483,75**	328,25
SEL.01.F40S1.0	SEL.01.F40XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	4000 K	Lens 25°	483,75**	328,25
SEL.03.F27A1.0	SEL.03.F27XX.0	13/11	Selene 3x	5W	24V	2700 K	Lens 25°	416,25**	286,50
SEL.03.F27S1.0	SEL.03.F27XX.0	13/11	Selene 3x	5W	24V	2700 K	Lens 25°	416,25**	286,50
SEL.03.F30A1.0	SEL.03.F30XX.0	13/11	Selene 3x	5W	24V	3000 K	Lens 25°	438,75**	300,32
SEL.03.F30S1.0	SEL.03.F30XX.0	13/11	Selene 3x	5W	24V	3000 K	Lens 25°	438,75**	300,32
SEL.03.F40A1.0	SEL.03.F40XX.0	13/11	Selene 3x	5W	24V	4000 K	Lens 25°	483,75**	328,25
SEL.03.F40S1.0	SEL.03.F40XX.0	13/11	Selene 3x	5W	24V	4000 K	Lens 25°	483,75**	328,25
SEL.02.F27A1.0	SEL.02.F27XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	2700 K	Lens 25°	459,20**	298,51
SEL.02.F27S1.0	SEL.02.F27XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	2700 K	Lens 25°	459,20**	298,51
SEL.02.F30A1.0	SEL.02.F30XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	3000 K	Lens 25°	481,60**	312,88
SEL.02.F30S1.0	SEL.02.F30XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	3000 K	Lens 25°	481,60**	312,88
SEL.02.F40A1.0	SEL.02.F40XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	4000 K	Lens 25°	526,40**	341,94
SEL.02.F40S1.0	SEL.02.F40XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	4000 K	Lens 25°	526,40**	341,94
SEL.02.F27A1.0	SEL.02.F27XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	2700 K	Lens 25°	615,00**	404,37
SEL.02.F27S1.0	SEL.02.F27XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	2700 K	Lens 25°	615,00**	404,37
SEL.02.F30A1.0	SEL.02.F30XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	3000 K	Lens 25°	645,00**	423,82
SEL.02.F30S1.0	SEL.02.F30XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	3000 K	Lens 25°	645,00**	423,82
SEL.02.F40A1.0	SEL.02.F40XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	4000 K	Lens 25°	705,00**	463,19
SEL.02.F40S1.0	SEL.02.F40XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	4000 K	Lens 25°	705,00**	463,19
SEL.04.F27A1.0	SEL.04.F27XX.0	13/11	Selene 4x	7W	24V	2700 K	Lens 25°	615,00**	404,37
SEL.04.F27S1.0	SEL.04.F27XX.0	13/11	Selene 4x	7W	24V	2700 K	Lens 25°	615,00**	404,37
SEL.04.F30A1.0	SEL.04.F30XX.0	13/11	Selene 4x	7W	24V	3000 K	Lens 25°	645,00**	423,82
SEL.04.F30S1.0	SEL.04.F30XX.0	13/11	Selene 4x	7W	24V	3000 K	Lens 25°	645,00**	423,82
SEL.04.F40A1.0	SEL.04.F40XX.0	13/11	Selene 4x	7W	24V	4000 K	Lens 25°	705,00**	463,19
SEL.04.F40S1.0	SEL.04.F40XX.0	13/11	Selene 4x	7W	24V	4000 K	Lens 25°	705,00**	463,19
SEL.01.W27A1.0	SEL.01.W27XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	2700 K	Lens 35°	344,40**	193,03
SEL.01.W27S1.0	SEL.01.W27XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	2700 K	Lens 35°	344,40**	193,03
SEL.01.W30A1.0	SEL.01.W30XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	3000 K	Lens 35°	361,20**	202,34
SEL.01.W30S1.0	SEL.01.W30XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	3000 K	Lens 35°	361,20**	202,34
SEL.01.W40A1.0	SEL.01.W40XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	4000 K	Lens 35°	394,80**	221,16
SEL.01.W40S1.0	SEL.01.W40XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	4000 K	Lens 35°	394,80**	221,16
SEL.01.W27A1.0	SEL.01.W27XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	2700 K	Lens 35°	416,25**	259,55
SEL.01.W27S1.0	SEL.01.W27XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	2700 K	Lens 35°	416,25**	259,55
SEL.01.W30A1.0	SEL.01.W30XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	3000 K	Lens 35°	438,75**	272,07
SEL.01.W30S1.0	SEL.01.W30XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	3000 K	Lens 35°	438,75**	272,07
SEL.01.W40A1.0	SEL.01.W40XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	4000 K	Lens 35°	483,75**	297,37

Product code	Code	Release date	Product	Power	Supply	CCT	Optics	lux (lm) *tj=25 **	Fixture Flux (lm)
SEL.01.W40S1.0	SEL.01.W40XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	4000 K	Lens 35°	483,75**	297,37
SEL.03.W27A1.0	SEL.03.W27XX.0	13/11	Selene 3x	5W	24V	2700 K	Lens 35°	416,25**	259,55
SEL.03.W27S1.0	SEL.03.W27XX.0	13/11	Selene 3x	5W	24V	2700 K	Lens 35°	416,25**	259,55
SEL.03.W30A1.0	SEL.03.W30XX.0	13/11	Selene 3x	5W	24V	3000 K	Lens 35°	438,75**	272,07
SEL.03.W30S1.0	SEL.03.W30XX.0	13/11	Selene 3x	5W	24V	3000 K	Lens 35°	438,75**	272,07
SEL.03.W40A1.0	SEL.03.W40XX.0	13/11	Selene 3x	5W	24V	4000 K	Lens 35°	483,75**	297,37
SEL.03.W40S1.0	SEL.03.W40XX.0	13/11	Selene 3x	5W	24V	4000 K	Lens 35°	483,75**	297,37
SEL.02.W27A1.0	SEL.02.W27XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	2700 K	Lens 35°	459,20**	269,40
SEL.02.W27S1.0	SEL.02.W27XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	2700 K	Lens 35°	459,20**	269,40
SEL.02.W30A1.0	SEL.02.W30XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	3000 K	Lens 35°	481,60**	282,36
SEL.02.W30S1.0	SEL.02.W30XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	3000 K	Lens 35°	481,60**	282,36
SEL.02.W40A1.0	SEL.02.W40XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	4000 K	Lens 35°	526,40**	308,59
SEL.02.W40S1.0	SEL.02.W40XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	4000 K	Lens 35°	526,40**	308,59
SEL.02.W27A1.0	SEL.02.W27XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	2700 K	Lens 35°	615,00**	364,93
SEL.02.W27S1.0	SEL.02.W27XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	2700 K	Lens 35°	615,00**	364,93
SEL.02.W30A1.0	SEL.02.W30XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	3000 K	Lens 35°	645,00**	382,48
SEL.02.W30S1.0	SEL.02.W30XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	3000 K	Lens 35°	645,00**	382,48
SEL.02.W40A1.0	SEL.02.W40XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	4000 K	Lens 35°	705,00**	418,02
SEL.02.W40S1.0	SEL.02.W40XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	4000 K	Lens 35°	705,00**	418,02
SEL.04.W27A1.0	SEL.04.W27XX.0	13/11	Selene 4x	7W	24V	2700 K	Lens 35°	615,00**	364,93
SEL.04.W27S1.0	SEL.04.W27XX.0	13/11	Selene 4x	7W	24V	2700 K	Lens 35°	615,00**	364,93
SEL.04.W30A1.0	SEL.04.W30XX.0	13/11	Selene 4x	7W	24V	3000 K	Lens 35°	645,00**	382,48
SEL.04.W30S1.0	SEL.04.W30XX.0	13/11	Selene 4x	7W	24V	3000 K	Lens 35°	645,00**	382,48
SEL.04.W40A1.0	SEL.04.W40XX.0	13/11	Selene 4x	7W	24V	4000 K	Lens 35°	705,00**	418,02
SEL.04.W40S1.0	SEL.04.W40XX.0	13/11	Selene 4x	7W	24V	4000 K	Lens 35°	705,00**	418,02
SEL.04.W90A1.0	SEL.04.W90XX.0	13/11	Selene 1x	4W	24V	RGB	Lens 45°	105,00*	57,83
SEL.04.W90S1.0	SEL.04.W90XX.0	13/11	Selene 1x	4W	24V	RGB	Lens 45°	105,00*	57,83
SEL.04.W90A1.0 R	SEL.04.W90XX.0 R	13/11	Selene 1x	4W	24V	RGB (Rosso)	Lens 45°	35,00*	21,60
SEL.04.W90S1.0 R	SEL.04.W90XX.0 R	13/11	Selene 1x	4W	24V	RGB (Rosso)	Lens 45°	35,00*	21,60
SEL.04.W90A1.0 G	SEL.04.W90XX.0 G	13/11	Selene 1x	4W	24V	RGB (Verde)	Lens 45°	57,00*	35,79
SEL.04.W90S1.0 G	SEL.04.W90XX.0 G	13/11	Selene 1x	4W	24V	RGB (Verde)	Lens 45°	57,00*	35,79
SEL.04.W90A1.0 B	SEL.04.W90XX.0 B	13/11	Selene 1x	4W	24V	RGB (Blu)	Lens 45°	13,00*	8,53
SEL.04.W90S1.0 B	SEL.04.W90XX.0 B	13/11	Selene 1x	4W	24V	RGB (Blu)	Lens 45°	13,00*	8,53
SEL.04.S90A1.0	SEL.04.S90XX.0	13/11	Selene 1x	4W	24V	RGB	Satin Glass	105,00*	33,42
SEL.04.S90S1.0	SEL.04.S90XX.0	13/11	Selene 1x	4W	24V	RGB	Satin Glass	105,00*	33,42
SEL.04.S90A1.0 R	SEL.04.S90XX.0 R	13/11	Selene 1x	4W	24V	RGB (Rosso)	Satin Glass	35,00*	12,32
SEL.04.S90S1.0 R	SEL.04.S90XX.0 R	13/11	Selene 1x	4W	24V	RGB (Rosso)	Satin Glass	35,00*	12,32
SEL.04.S90A1.0 G	SEL.04.S90XX.0 G	13/11	Selene 1x	4W	24V	RGB (Verde)	Satin Glass	57,00*	20,41
SEL.04.S90S1.0 G	SEL.04.S90XX.0 G	13/11	Selene 1x	4W	24V	RGB (Verde)	Satin Glass	57,00*	20,41
SEL.04.S90A1.0 B	SEL.04.S90XX.0 B	13/11	Selene 1x	4W	24V	RGB (Blu)	Satin Glass	13,00*	4,87
SEL.04.S90S1.0 B	SEL.04.S90XX.0 B	13/11	Selene 1x	4W	24V	RGB (Blu)	Satin Glass	13,00*	4,87
SEL.01.S27A1.0	SEL.01.S27XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	2700 K	Satin Glass	344,40**	132,08
SEL.01.S27S1.0	SEL.01.S27XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	2700 K	Satin Glass	344,40**	132,08
SEL.01.S30A1.0	SEL.01.S30XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	3000 K	Satin Glass	361,20**	138,45
SEL.01.S30S1.0	SEL.01.S30XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	3000 K	Satin Glass	361,20**	138,45
SEL.01.S40A1.0	SEL.01.S40XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	4000 K	Satin Glass	394,80**	151,33
SEL.01.S40S1.0	SEL.01.S40XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	4000 K	Satin Glass	394,80**	151,33
SEL.01.S27A1.0	SEL.01.S27XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	2700 K	Satin Glass	416,25**	177,60
SEL.01.S27S1.0	SEL.01.S27XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	2700 K	Satin Glass	416,25**	177,60
SEL.01.S30A1.0	SEL.01.S30XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	3000 K	Satin Glass	438,75**	186,16
SEL.01.S30S1.0	SEL.01.S30XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	3000 K	Satin Glass	438,75**	186,16
SEL.01.S40A1.0	SEL.01.S40XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	4000 K	Satin Glass	483,75**	203,47
SEL.01.S40S1.0	SEL.01.S40XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	4000 K	Satin Glass	483,75**	203,47
SEL.03.S27A1.0	SEL.03.S27XX.0	13/11	Selene 3x	5W	24V	2700 K	Satin Glass	416,25**	177,60
SEL.03.S27S1.0	SEL.03.S27XX.0	13/11	Selene 3x	5W	24V	2700 K	Satin Glass	416,25**	177,60
SEL.03.S30A1.0	SEL.03.S30XX.0	13/11	Selene 3x	5W	24V	3000 K	Satin Glass	438,75**	186,16
SEL.03.S30S1.0	SEL.03.S30XX.0	13/11	Selene 3x	5W	24V	3000 K	Satin Glass	438,75**	186,16
SEL.03.S40A1.0	SEL.03.S40XX.0	13/11	Selene 3x	5W	24V	4000 K	Satin Glass	483,75**	203,47
SEL.03.S40S1.0	SEL.03.S40XX.0	13/11	Selene 3x	5W	24V	4000 K	Satin Glass	483,75**	203,47
SEL.02.S27A1.0	SEL.02.S27XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	2700 K	Satin Glass	459,20**	176,32
SEL.02.S27S1.0	SEL.02.S27XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	2700 K	Satin Glass	459,20**	176,32
SEL.02.S30A1.0	SEL.02.S30XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	3000 K	Satin Glass	481,60**	184,80
SEL.02.S30S1.0	SEL.02.S30XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	3000 K	Satin Glass	481,60**	184,80
SEL.02.S40A1.0	SEL.02.S40XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	4000 K	Satin Glass	526,40**	201,97
SEL.02.S40S1.0	SEL.02.S40XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	4000 K	Satin Glass	526,40**	201,97
SEL.02.T27A1.0	SEL.02.T27XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	2700 K	Satin Glass	615,00**	238,84
SEL.02.T27S1.0	SEL.02.T27XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	2700 K	Satin Glass	615,00**	238,84
SEL.02.T30A1.0	SEL.02.T30XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	3000 K	Satin Glass	645,00**	250,33
SEL.02.T30S1.0	SEL.02.T30XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	3000 K	Satin Glass	645,00**	250,33
SEL.02.T40A1.0	SEL.02.T40XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	4000 K	Satin Glass	705,00**	273,59
SEL.02.T40S1.0	SEL.02.T40XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	4000 K	Satin Glass	705,00**	273,59
SEL.04.T27A1.0	SEL.04.T27XX.0	13/11	Selene 4x	7W	24V	2700 K	Satin Glass	615,00**	238,84
SEL.04.T27S1.0	SEL.04.T27XX.0	13/11	Selene 4x	7W	24V	2700 K	Satin Glass	615,00**	238,84
SEL.04.T30A1.0	SEL.04.T30XX.0	13/11	Selene 4x	7W	24V	3000 K	Satin Glass	645,00**	250,33
SEL.04.T30S1.0	SEL.04.T30XX.0	13/11	Selene 4x	7W	24V	3000 K	Satin Glass	645,00**	250,33
SEL.04.T40A1.0	SEL.04.T40XX.0	13/11	Selene 4x	7W	24V	4000 K	Satin Glass	705,00**	273,59
SEL.04.T40S1.0	SEL.04.T40XX.0	13/11	Selene 4x	7W	24V	4000 K	Satin Glass	705,00**	273,59
SEL.04.T90A1.0	SEL.04.T90XX.0	13/11	Selene 1x	4W	24V	RGB	Trasparent Glass	105,00*	38,14
SEL.04.T90S1.0	SEL.04.T90XX.0	13/11	Selene 1x	4W	24V	RGB	Trasparent Glass	105,00*	38,14
SEL.04.T90A1.0 R	SEL.04.T90XX.0 R	13/11	Selene 1x	4W	24V	RGB (Rosso)	Trasparent Glass	35,00*	13,58

Product code	Code	Release date	Product	Power	Supply	CCT	Optics	lux (lm) *tj=25 **	Fixture Flux (lm)
SEL.04.T90S1.0	SEL.04.T90XX.0 R	13/11	Selene 1x	4W	24V	RGB (Rosso)	Trasparent Glass	35,00*	13,58
SEL.04.T90A1.0	SEL.04.T90XX.0 G	13/11	Selene 1x	4W	24V	RGB (Verde)	Trasparent Glass	57,00*	22,50
SEL.04.T90S1.0	SEL.04.T90XX.0 G	13/11	Selene 1x	4W	24V	RGB (Verde)	Trasparent Glass	57,00*	22,50
SEL.04.T90A1.0	SEL.04.T90XX.0 B	13/11	Selene 1x	4W	24V	RGB (Blu)	Trasparent Glass	13,00*	5,36
SEL.04.T90S1.0	SEL.04.T90XX.0 B	13/11	Selene 1x	4W	24V	RGB (Blu)	Trasparent Glass	13,00*	5,36
SEL.01.T27A1.0	SEL.01.T27XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	2700 K	Trasparent Glass	344,40**	145,68
SEL.01.T27S1.0	SEL.01.T27XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	2700 K	Trasparent Glass	344,40**	145,68
SEL.01.T30A1.0	SEL.01.T30XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	3000 K	Trasparent Glass	361,20**	152,70
SEL.01.T30S1.0	SEL.01.T30XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	3000 K	Trasparent Glass	361,20**	152,70
SEL.01.T40A1.0	SEL.01.T40XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	4000 K	Trasparent Glass	394,80**	166,90
SEL.01.T40S1.0	SEL.01.T40XX.0 350mA	13/11	Selene 3x	3x1W	350 mA	4000 K	Trasparent Glass	394,80**	166,90
SEL.01.T27A1.0	SEL.01.T27XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	2700 K	Trasparent Glass	416,25**	195,88
SEL.01.T27S1.0	SEL.01.T27XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	2700 K	Trasparent Glass	416,25**	195,88
SEL.01.T30A1.0	SEL.01.T30XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	3000 K	Trasparent Glass	438,75**	205,32
SEL.01.T30S1.0	SEL.01.T30XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	3000 K	Trasparent Glass	438,75**	205,32
SEL.01.T40A1.0	SEL.01.T40XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	4000 K	Trasparent Glass	483,75**	224,42
SEL.01.T40S1.0	SEL.01.T40XX.0 500mA	13/11	Selene 3x	3x1,5W	500 mA	4000 K	Trasparent Glass	483,75**	224,42
SEL.03.T27A1.0	SEL.03.T27XX.0	13/11	Selene 3x	5W	24V	2700 K	Trasparent Glass	416,25**	195,88
SEL.03.T27S1.0	SEL.03.T27XX.0	13/11	Selene 3x	5W	24V	2700 K	Trasparent Glass	416,25**	195,88
SEL.03.T30A1.0	SEL.03.T30XX.0	13/11	Selene 3x	5W	24V	3000 K	Trasparent Glass	438,75**	205,32
SEL.03.T30S1.0	SEL.03.T30XX.0	13/11	Selene 3x	5W	24V	3000 K	Trasparent Glass	438,75**	205,32
SEL.03.T40A1.0	SEL.03.T40XX.0	13/11	Selene 3x	5W	24V	4000 K	Trasparent Glass	483,75**	224,42
SEL.03.T40S1.0	SEL.03.T40XX.0	13/11	Selene 3x	5W	24V	4000 K	Trasparent Glass	483,75**	224,42
SEL.02.T27A1.0	SEL.02.T27XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	2700 K	Trasparent Glass	459,20**	192,76
SEL.02.T27S1.0	SEL.02.T27XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	2700 K	Trasparent Glass	459,20**	192,76
SEL.02.T30A1.0	SEL.02.T30XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	3000 K	Trasparent Glass	481,60**	202,03
SEL.02.T30S1.0	SEL.02.T30XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	3000 K	Trasparent Glass	481,60**	202,03
SEL.02.T40A1.0	SEL.02.T40XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	4000 K	Trasparent Glass	526,40**	220,80
SEL.02.T40S1.0	SEL.02.T40XX.0 350mA	13/11	Selene 4x	4x1W	350 mA	4000 K	Trasparent Glass	526,40**	220,80
SEL.02.T27A1.0	SEL.02.T27XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	2700 K	Trasparent Glass	615,00**	261,11
SEL.02.T27S1.0	SEL.02.T27XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	2700 K	Trasparent Glass	615,00**	261,11
SEL.02.T30A1.0	SEL.02.T30XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	3000 K	Trasparent Glass	645,00**	273,67
SEL.02.T30S1.0	SEL.02.T30XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	3000 K	Trasparent Glass	645,00**	273,67
SEL.02.T40A1.0	SEL.02.T40XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	4000 K	Trasparent Glass	705,00**	299,10
SEL.02.T40S1.0	SEL.02.T40XX.0 500mA	13/11	Selene 4x	4x1,5W	500 mA	4000 K	Trasparent Glass	705,00**	299,10
SEL.04.T27A1.0	SEL.04.T27XX.0	13/11	Selene 4x	7W	24V	2700 K	Trasparent Glass	615,00**	261,11
SEL.04.T27S1.0	SEL.04.T27XX.0	13/11	Selene 4x	7W	24V	2700 K	Trasparent Glass	615,00**	261,11
SEL.04.T30A1.0	SEL.04.T30XX.0	13/11	Selene 4x	7W	24V	3000 K	Trasparent Glass	645,00**	273,67
SEL.04.T30S1.0	SEL.04.T30XX.0	13/11	Selene 4x	7W	24V	3000 K	Trasparent Glass	645,00**	273,67
SEL.04.T40A1.0	SEL.04.T40XX.0	13/11	Selene 4x	7W	24V	4000 K	Trasparent Glass	705,00**	299,10
SEL.04.T40S1.0	SEL.04.T40XX.0	13/11	Selene 4x	7W	24V	4000 K	Trasparent Glass	705,00**	299,10